


Model: JSMA-PBC01AWKB


No.	Item	Symbol	Unit	Specification	No.	Item	Symbol	Unit	Specification
1	Drive	-	-	3 ϕ 220 VAC	13	Rotor Inertia	J-M	kg-cm ²	0.089 \pm 10%
2	Cooling Method	-	-	Totally Enclosed	14	Rated Power Rate	Q-R	Kw/s	11.51
3	Exciting Method	-	-	Permanent Magnet	15	Resistance	Ra	Ω	24 \pm 10%/2 ϕ
4	Resolution	-	-	23 bit-ABS	16	Inductance	L	mH	22 \pm 10%
5	Rated Output	P-R	W	100	17	Mech. Time Constant	Tm	ms	2.21 \pm 10%
6	Rated Torque	T-R	N-m	0.32	18	Elect. Time Constant	Te	ms	0.92 \pm 10%
7	Max. Torque	T-max	N-m	0.95	19	Insulation Class	-	-	Class F
8	Rated Speed	N-R	rpm	3000	20	Operation Temp.	T	$^{\circ}$ C	0~40
9	Rated Current	I-R	A	0.9	21	Operation Humd.	RH	%	<80
10	Max. Current	I-max	A	2.7	22	Storage Temp.	T	$^{\circ}$ C	-20~60
11	Torque Constant	Kt	N-m/A	0.35 \pm 10%	23	Storage Humd.	RH	%	<80
12	Back emf(at 1000rpm)	Vemf	Volts	25 \pm 10%	24	Weight	W	kgw	0.7



1	U	Red
2	V	White
3	W	Black
4	F/G	G/Y

Motor Connection

NO	Signal	Color
1	Vcc	red
2	GND	black
3	VB+	brown
4	VB-	brown/black
5	SD+	blue
6	SD-	blue/black
7		
8		
9	FG	SHIELD



Encoder Connection

AC SERVO MOTOR


Model: JSMA-PBC01AWKB

Pr. 0.1 KW ; Nr. 3000 rpm

Ir. 0.9 A , Tr. 0.32 N-m

NO. _____

TECO ELECTRIC & MACHINERY CO., LTD. MADE IN TAIWAN

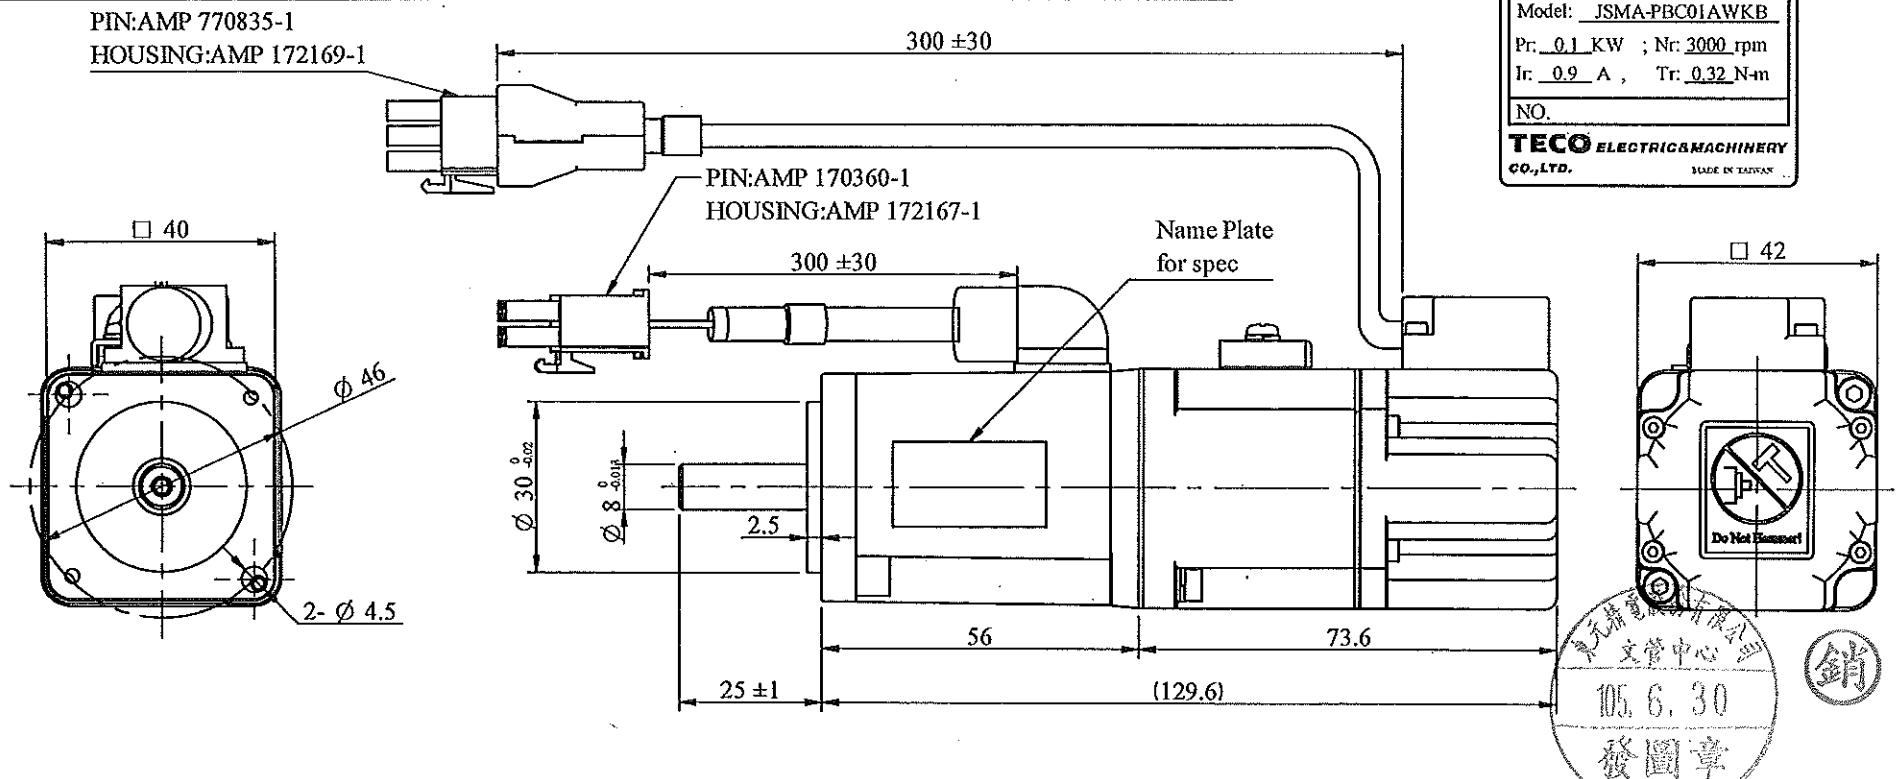

銷
105.6.30
發圖章

STANDARD TOLERANCE					APVD	2	6/20/16	SCALE		UNIT	m m	NAME	SERVO MOTOR OUTLINE DRAWING	
X	\pm 0.5				CHKD	Michelle	6-20-16	3RD. A.P		TITLE	JSMA-PBC01AWKB			
X	\pm 0.2				CHKD									
.XX	\pm 0.05				DWN	Leon	06-16-16			Dept. Design	DWG. NO.	D01E04101C3BR3D01		
ANGLE	\pm 30'													
MATERIAL		REV	DESCRIPTION	SIGNATURE	DATE	SIGNATURE	DATE							