
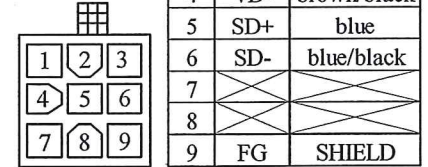



Model: JSMA-PBC04A WA									
No.	Item	Symbol	Unit	Specification	No.	Item	Symbol	Unit	Specification
1	Drive	-	-	3 φ 220VAC	13	Rotor Inertia	J-M	kg-cm ²	0.67±10%
2	Cooling Method	-	-	Totally Enclosed	14	Rated Power Rate	Q-R	Kw/s	24.07
3	Exciting Method	-	-	Permanent Magnet	15	Resistance	Ra	Ω	3.15±10%/2 φ
4	Resolution	-	-	23 bit ABS	16	Inductance	L	mH	11±10%/2 φ
5	Rated Output	P-R	KW	0.4	17	Mech. Time Constant	Tm	ms	1.24±10%
6	Rated Torque	T-R	N-m	1.27	18	Elect. Time Constant	Te	ms	3.49±10%
7	Max. Torque	T-max	N-m	3.81	19	Insulation Class	-	-	Class F
8	Rated Speed	N-R	rpm	3000	20	Operation Temp.	T	°C	0~40
9	Rated Current	I-R	A	2.6	21	Operation Humd.	RH	%	<80
10	Max. Current	I-max	A	8.1	22	Storage Temp.	T	°C	-20~60°
11	Torque Constant	Kt	N-m/A	0.47±10%	23	Storage Humd.	RH	%	<80
12	Ke constant	Ke	V/Krpm	32.78±10%/2 φ	24	Weight	W	kgw	1.53



Motor Wiring

Encoder Wiring

- Note:
1. Motor to be IP67. (excluding the shaft opening & connectors)
 2. The detail of Name plate for Spec. refers to the file DC-JXE-002.

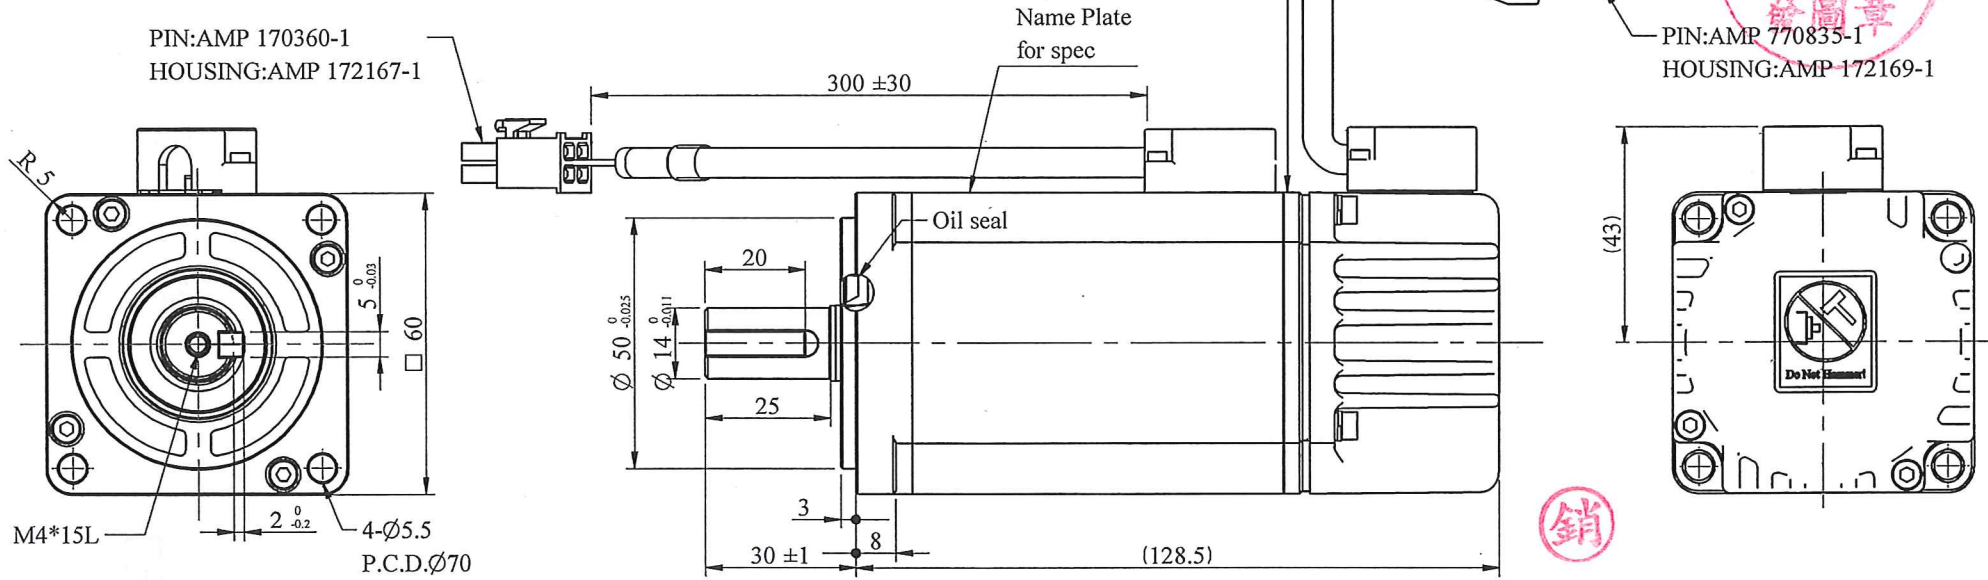

STANDARD TOLERANCE					APVD	<i>[Signature]</i>	SCALE	2/3	UNIT	m m	NAME	SERVO MOTOR OUTLINE DRAWING	
X	±0.5				CHKD	<i>Michelle</i>	3RD .A.P		TITLE	JSMA-PBC04A WA			
.X	±0.2				CHKD								
.XX	±0.05				DWN	Chase	07-25-17			TECO ELECTRO DEVICES CO., LTD.	Dept. Design	DWG. NO.	D01E06401C3NR3C01
ANGLE	±30'				SIGNATURE		DATE						